


# THE FUTURE IS SHOCK PROOF



# Technical Data Sheet

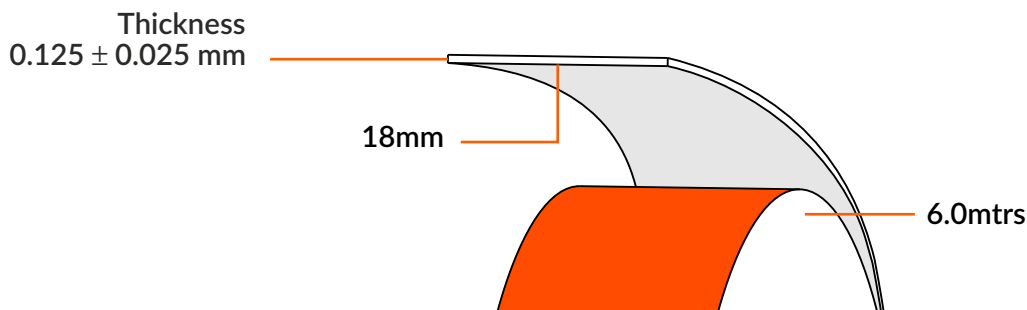

Specifications		Product Code: 912220	
Length	6.0 m	Di-Electric Strength (RT)	40 kV/mm
Thickness	0.125 ± 0.025 mm	Di-Electric Strength (Humid)	35 kV/mm
Backing	PVC	Flammability	Self-Extinguishing
Adhesive	Rubber-Based	Insulation Resistance	10 <sup>5</sup> MΩ/25 mm width
Adhesion to Backing	1.3 N/10 mm width	Elongation at Break	>150%
Tensile Strength*	150 N/10 mm width	Operating Temperature	0-80°C

\*per mm thickness









FR-PVC Electrical Insulation Tape 0.125mm x 18mm x 6.0mtrs.

## Colours



## Exceptional Features

Pressfit PVC Insulation Tape, with its outstanding PVC film and specialized adhesive, delivers unparalleled value!

-  **Leak-Proof:** With optimal adhesive loading, there is no leakage/spilling of it from the sides of the tape.
-  **Non-Sticky Adhesive:** The specialized adhesive does not leave any sticky residue on the surface after removal.
-  **Pinhole-Free:** The tape is highly resistant to pinholes and tearing preventing shocks and mishaps due to wire strands pricking out of the tape.
-  **Fire Retardant**
-  **Resistance To Abrasion**
-  **High Elasticity**
-  **Superior Adhesive**
-  **Withstands upto 6000V AC**

IS:7809 (III)



1800-2121-770



pressfitindia

<https://pressfitindia.com>